

Edition: 05/06 - subject to change

Supersedes: 09/90

Status: valid

64717 (230/240V)


■ Product description

The OSRAM 64717 is mainly used for studio and theatre lighting as well as film production and fitted into Fresnel, Profile, PC Spot and Follow Spot luminaires.

■ Technical Data

Lamp / order reference	64717	
ANSI	FRL	
LIF	CP/89	
Rated lamp wattage	W	650
Rated lamp voltage	V	230/240
Average life-time	h	150
Color temperature	K	3200
Luminous flux	lm	16250
Luminous efficacy	lm/W	25 (26*)
Base	GY 9.5	
Diameter d	mm	23
Lamp length l	mm	90
LCL a	mm	46.5 ± 1
Filament dimensions (w x h)	mm	26 x 33
Type of filament	biplan	

* referred to 240V

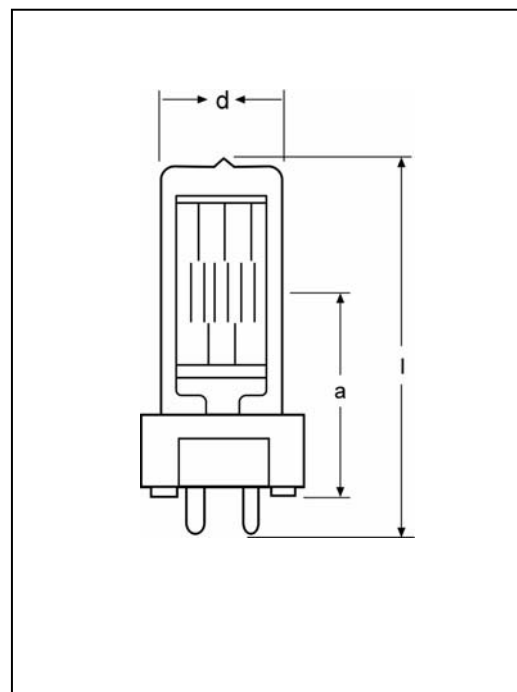

■ Lamp operation

Max. pinch seal temperature	°C	350°C max.
Burning position	s90	
Fuse protection	D-Fusing 500 V, 4 A quick	
Remarks	Use of closed luminaires is recommended	