

## Application

Beam style	variable-spread, soft-edged beam
Suitable for	theatres, TV studios, architectural and commercial applications
Specification level	professional range
Beam angle	9°- 58°
Typical throw distance	2 – 20m

## Electrical specifications

Light source	230W LED, white
Supply Volts	100/260V AC single phase
Frequency / Current	50/60Hz – 1.17A @ 230V AC – 2,35A @110V AC
Power consumption	250W at full power
Cable/connection	1,6m mains cable with fitted Neutrik powercon IN and OUT, supplied
Standards Compliance	EN60598-2-17, CE marked

## Mechanical specifications

Construction	extruded aluminium and steel sheet
Mounting & suspension	steel stirrup 12mm centre hole + DIN mounting.
Handle	rear
Weight/Packed weight	9,7 kg / 11,9 kg
Colour frame	metal, 185x185mm, supplied

## Operational specifications

Focus adjustment	screw focus with control at rear
Beam Shaping	using barndoor accessory
DMX channels / connection	1 to 3 ch / XLR5 connectors, IN/OUT
Colour	white, single source, no colour shift in fading
Dimming	from rear panel encoder or remote, 8 or 16 bits, via DMX
LED temperature	built-in sensor for real time monitoring
Ambient temperature	35°C max.
Fan speed control	3 modes available: Silent /Auto/Constant
Fade curve	2 curves (linear, square)
LED Frequency	16KHz - Flicker free
LCD display	set-up, dmx, monitor, diagnostic
RDM	integrated

## Optical specifications

Optical system	150mm diameter high quality Fresnel lens
LED array	white, round-shaped, replaceable
Rated LED life	50,000 hours at 25°C, maintains 70% of original intensity
Beam colour temperature	3200K or 5600K
CRI (Colour Rendering Index)	>90

## Accessories

Spare metal colour frame	■ 20100106 □ 20100106B □ 20100106C
4-leaf barndoor	■ 20100306 □ 20100306B □ 20100306C
Hook clamp	20100900 Safety bond 20101300

## Photometric data

Spot	3200K									
Beam dia.	0.6	0.9	1.3	1.6	1.9	2.2	2.5	2.8	3.1	m
Lux	10829	4812	2707	1732	1203	884	677	534	433	
Distance	4	6	8	10	12	14	16	18	20	m

Flood										
Beam dia.	4.4	6.7	8.9	11.1	13.3	15.5	17.7	20	22.2	m
Lux	1247	554	312	200	139	102	78	62	50	
Distance	4	6	8	10	12	14	16	18	20	m

Spot	5600K									
Beam dia.	0.6	0.9	1.3	1.6	1.9	2.2	2.5	2.8	3.1	m
Lux	11616	5163	2904	1858	1290	948	720	573	465	
Distance	4	6	8	10	12	14	16	18	20	m


Flood										
Beam dia.	4.4	6.7	8.9	11.1	13.3	15.5	17.7	20	22.2	m
Lux	1379	612	344	220	153	112	86	68	56	
Distance	4	6	8	10	12	14	16	18	20	m

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

# alba f250

230W,100/260VAC,DMX512+RDM  
led fresnel luminaire


part # ■ 01201000	□ 01201001	□ 01201002	3200K
part # ■ 01201100	□ 01201101	□ 01201102	5600K

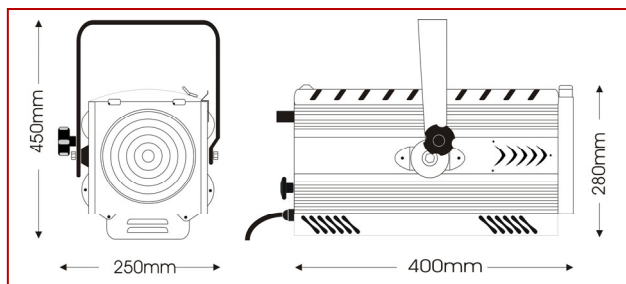

A high efficiency 230W led module featuring a PWM dimming power source harnessed in the high-specification optics of LDR fresnel spotlights.

Ideal in all applications where heat and energy saving are a concern. Its extremely accurate optics make it the obvious choice in theatrical sets, TV studios, commercial displays and architectural applications where an even, soft-edged beam is required. Standard delivery includes 1.5m mains cable with fitted Power-con and a metal colour frame.

All models in the Alba range are available in 3200K and 5600K white, RGBW and TW, in a choice of 3 finishes: black, white and silver, and 2 stirrups: manual and pole-operated



Luci della Ribalta srl  
Via Berna 14  
46042 Castel Goffredo (MN), Italy  
tel: +39 0376 771777  
[www.ldr.it](http://www.ldr.it) [info@ldr.it](mailto:info@ldr.it)

issue: ap ©2020. LDR reserves the right to alter the specification without prior notice.