

Edition: 05/06 - subject to change

Supersedes: /
Status: valid


64744 (230V)

■ Product description

The OSRAM 64744 is used for most 1K theatre lighting and fitted into Fresnel, Profile, PC Spot and Follow Spot luminaires. The 64745 CP/70 is an equivalent for 3200K.

■ Technical Data

Lamp / order reference		64744
ANSI		FWP
LIF		T/19
Rated lamp wattage	W	1000
Rated lamp voltage	V	230
Average life-time	h	750
Color temperature	K	3000
Luminous flux	lm	21150
Luminous efficacy	lm/W	20.5
Base		GX9.5
Diameter d	mm	25 ± 1
Lamp length L	mm	110 max.
LCL a	mm	55 ± 2
Filament dimensions (w x h)	mm	13 x 15
Type of coil		biplan

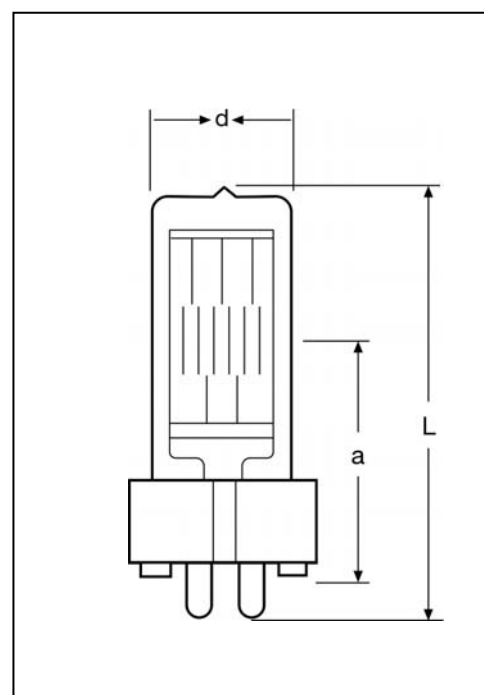

■ Lamp operation

Max. pinch seal temperature	°C	350°C max.
Burning position		s90
Fuse protection		6A quick